

## Hysteroscopes from KARL STORZ

Diagnostic and Operative Solutions  
for “Office Hysteroscopy”



# CAMPO TROPHYSCOPE®

## Based on integrated 2 mm rod lens telescope

### Special Features:

- Allows an atraumatic primary approach to the uterine cavity under visualization thanks to a diameter of only 2.9 mm
- Compact 2.9 mm diameter enables diagnostic examination of the uterine cavity while the sheath is in a passive position
- If needed, the sheath can be moved from the passive to the active position for dilation under visual control
- Possible to use two different sheaths:
  - Continuous-Flow examination sheath
  - Continuous-Flow operating sheath for using semirigid 5 Fr. operating instruments and bipolar electrodes
- Sheaths provide the possibility to guide a TROPHY curette or spirotome in order to perform endometrial biopsies in a targeted manner

### Without working channel



26008BAC CAMPO **TROPHYSCOPE®**, HOPKINS® telescope 30°, size 2.9 mm, length 24 cm, with irrigation connector, for use with Continuous-Flow Operating Sheaths 26152DA and 26152DB

26152DA **Continuous-Flow Examination Sheath**, size 3.7 mm, length 18 cm, with suction adaptor, for use with CAMPO TROPHYSCOPE® 26008BAC

### With working channel




26008BAC CAMPO **TROPHYSCOPE**<sup>®</sup>, HOPKINS<sup>®</sup> telescope 30°, size 2.9 mm, length 24 cm, with irrigation connector, for use with Continuous-Flow Operating Sheaths 26152DA and 26152DB

26152DB **Continuous-Flow Operating Sheath**, size 4.4 mm, length 16 cm, with channel for semirigid instruments 5 Fr., with 1 stopcock and 1 LUER-Lock adaptor, for use with CAMPO TROPHYSCOPE<sup>®</sup> 26008BAC

### Recommended Accessories:



 26152DS **TROPHY Curette**, for use with Continuous-Flow Sheaths 26152DA and 26152DB

## BETTOCCHI® Hysteroscope (5 mm)

Based on 2.9 mm rod lens telescope


### Special Features:

- Atraumatic insertion in the cervical canal due to oval sheath
- Working channel allows the use of semirigid 5 Fr. operating instruments and bipolar electrodes



26120BA **HOPKINS® Forward-Oblique Telescope 30°**, diameter 2.9 mm, length 30 cm, **autoclavable**, fiber optic light transmission incorporated, color code: red

### With working channel

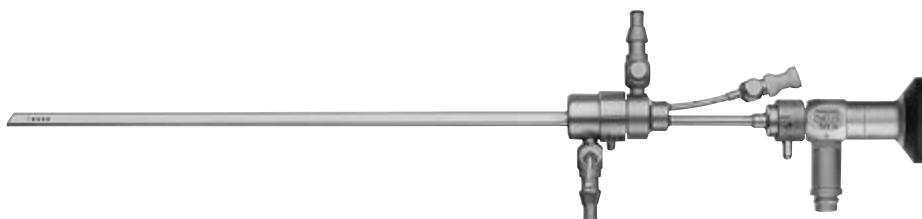

26153BIK **BETTOCCHI® Inner Sheath**, size 4.3 mm, with working channel for semirigid 5 Fr. operating instruments, for use with Outer Sheath 26153BOK including:  
**LUER-Lock Tube Connector**


26153BOK **BETTOCCHI® Outer Sheath**, size 5 mm, for use with Inner Sheath 26153BIK including:  
**LUER-Lock Tube Connector**

## Without working channel



26161VBK **Inner Sheath**, diameter 3.8 mm, with 1 stopcock,  
for use with Outer Sheath 26161VCK  
including:  
**LUER-Lock Tube Connector**

26161VCK **Outer Sheath**, diameter 4.5 mm, with 1 stopcock,  
for use with Inner Sheath 26161VBK  
including:  
**LUER-Lock Tube Connector**

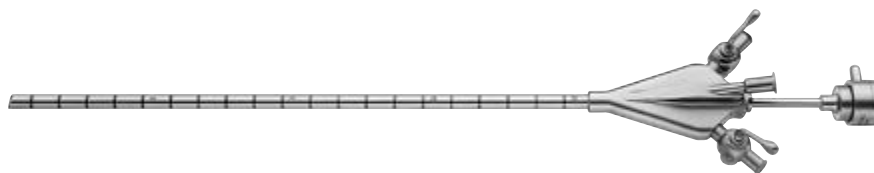

26153EA **Hysteroscope Sheath**, size 5 mm, with channel for 5 Fr. operating  
instruments, no separate inner and outer sheaths

## Elongated BETTOCCHI® Hysteroscope

26120BAL **HOPKINS® Forward-Oblique Telescope 30°**, diameter 2.9 mm,  
length 36 cm, **autoclavable**, fiber optic light transmission incorporated,  
color code: red

26153BIL **BETTOCCHI® Inner Sheath**, size 4.3 mm, with channel  
for semirigid 5 Fr. operating instruments, with 1 stopcock,  
for use with Outer Sheath 26153BOL

26153BOL **BETTOCCHI® Outer Sheath**, size 5 mm, working length 28 cm,  
with 1 stopcock, for use with Inner Sheath 26153BIL

The matching mechanical 5 Fr. instruments for the working channel bear the code number  
26160XX.

# BETTOCCHI® Hysteroscope (4 mm)

## Based on 2 mm rod lens telescope


### Special Features:

- Atraumatic insertion into the cervix thanks to the oval sheath and an outer diameter of 4.2 mm
- Working channel allows the use of semirigid 5 Fr. operating instruments and bipolar electrodes



26008BA **HOPKINS® Forward-Oblique Telescope 30°**, diameter 2 mm, length 26 cm, **autoclavable**, fiber optic light transmission incorporated, color code: red

### With working channel

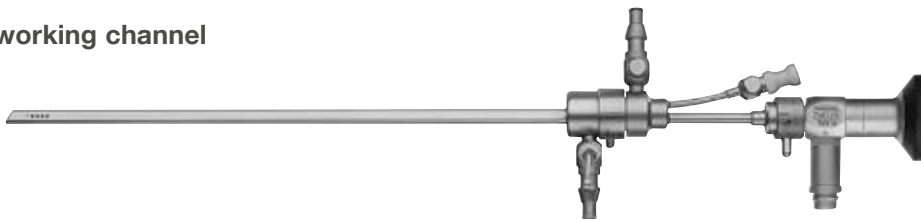

26152BIK **BETTOCCHI® Inner Sheath**, size 3.6 mm, with working channel for semirigid 5 Fr. operating instruments, for use with Outer Sheath 26152BOK including:

**LUER-Lock Tube Connector**

26152BOK **BETTOCCHI® Outer Sheath**, size 4.2 mm, for use with Inner Sheath 26152BIK including:

**LUER-Lock Tube Connector**

### Without working channel



26161RNK **Inner Sheath**, diameter 2.8 mm, with 1 stopcock, for use with Outer Sheath 26161RK including:

**LUER-Lock Tube Connector**

26161RK **Continuous-Flow Outer Sheath**, diameter 3.6 mm, with 1 stopcock, for use with Inner Sheaths 26161 RNK and 26162RNK including:

**LUER-Lock Tube Connector**

# BETTOCCHI® Integrated Office Hysteroscope (B.I.O.H.®)

Based on integrated 2 mm rod lens telescope


## Special Features:

- Atraumatic insertion into the cervix thanks to the oval sheath and an outer diameter of 4 mm
- Single-handed operation and control of inflow/outflow possible
- All connectors positioned downwards away from the ergonomic handle
- Working channel allows the use of semirigid 5 Fr. operating instruments and bipolar electrodes




- 26252BK BETTOCCHI® **B.I.O.H.® Compact Hysteroscope**,  
HOPKINS® telescope 30°, size 4 mm, with working channel for semirigid  
5 Fr. operating instruments, with suction and irrigation valves for single  
or continuous-flow use, long handle  
including:  
**Outer Sheath**  
2x **Suction and Irrigation Valve**  
**Monobloc Adaptor**  
**Sealing Cap “Endoscopic Seal”**,  
for working channels, package of 10  
2x **Valve Seat Adaptor**  
**Assembly Aid**, for B.I.O.H.® valves

## Optional Accessories

- 100010-10 **Endoscopic Seal**, for working channels for 3-7 Fr. instruments, STERILE   
sterile, for single use, package of 10

## Accessories

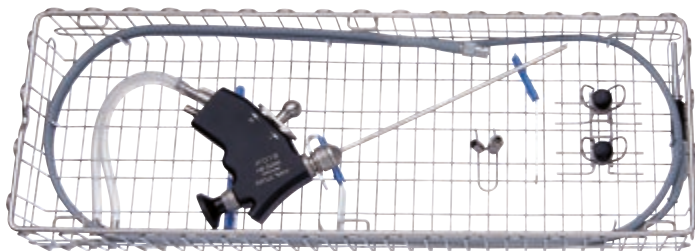

- 39501XC **Wire Tray for Cleaning, Sterilization and Storage** of one B.I.O.H.<sup>®</sup> compact hysteroscope, including cleaning adaptor, silicone telescope holders and lid, external dimensions (w x d x h): 460 x 150 x 80 mm, for use with Cleaning Adaptor 39501XCA (B.I.O.H.<sup>®</sup> and light cable not included in delivery)



- 031317-10 **Tubing Set**, with Monobloc connector and irrigation and suction tube, sterile, for single use, package of 10, for use with B.I.O.H.<sup>®</sup> Compact Hysteroscope 26252BC in combination with HAMOU<sup>®</sup> ENDOMAT<sup>®</sup> SCB 26331020 (connection to pump only with Tubing Set 031167-01)




- 26252DS **Seal Set**, for B.I.O.H.<sup>®</sup> Compact Hysteroscope 26252BK



## Semirigid and Reusable 5 Fr. Operating Instruments

Length 34 cm

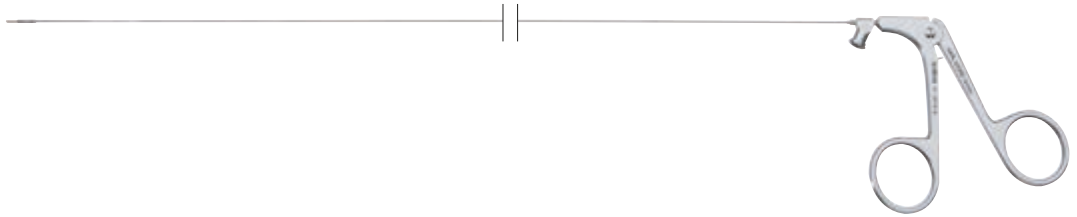

26159EHW **Scissors**, semirigid, blunt, single action jaws, 5 Fr., length 34 cm



26159SHW **Scissors**, semirigid, pointed, single action jaws, 5 Fr., length 34 cm



26159UHW **Biopsy and Grasping Forceps**, semirigid, double action jaws, 5 Fr., length 34 cm



26159H **HESSELING Tenaculum Grasping Forceps**, semirigid, double action jaws, 5 Fr., length 34 cm



26159DHW **Punch**, semirigid, through-cutting, single action jaws, 5 Fr., length 34 cm



26159BHW **Biopsy Spoon Forceps**, semirigid, double action jaws, 5 Fr., length 34 cm



26159DS **DI SPIEZIO SARDO Grasping Forceps**, semirigid, double action jaws, 5 Fr., length 34 cm



26159HS **HESSELING and DI SPIEZIO SARDO Tenaculum Grasping Forceps with Spike**, semirigid, double action jaws, 5 Fr., length 34 cm



26159M **BETTOCCHI® Myoma Fixation Instrument**, semirigid, 5 Fr., length 34 cm



26159G **BETTOCCHI®/DI SPIEZIO SARDO Palpation Probe**, semirigid, scaled, 5 Fr., length 34 cm

## Reusable Bipolar 5 Fr. Electrodes

Length 42 cm



26159BE **Bipolar Dissection Electrode**, semirigid,  
5 Fr., length 42 cm



26158BE **Bipolar Vaporization Electrode**, semirigid, 5 Fr.,  
needle electrode angled 90°, length 42 cm



26159GC GORDTS/CAMPO **Bipolar Ball Electrode**,  
semirigid, 5 Fr., length 42 cm




26176LE **Bipolar High Frequency Cord**, length 300 cm

# Flexible Hysteroscope

## Special Features:

- Insertion in the cervical canal generally possible without dilation thanks to diameter of 3.5 mm
- Easy insertion in the cervical canal thanks to reinforced sheath
- Lockable distal deflection mechanism
- Working channel for use with flexible 3 Fr. operating instruments

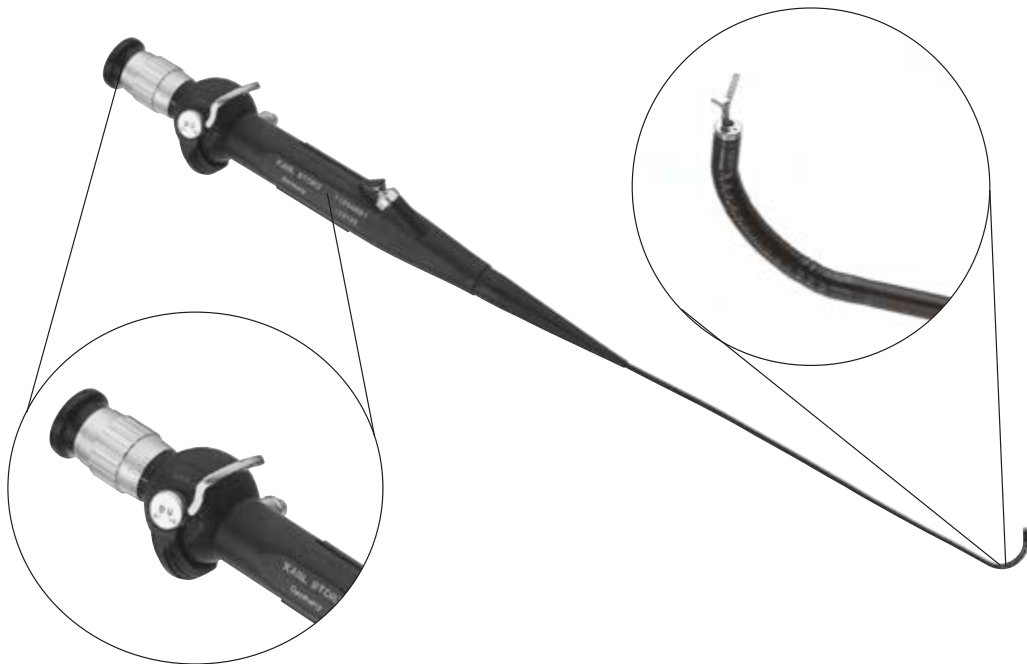

11264BBK1 **Hystero-Fiberscope**, with lockable deflection mechanism,

Deflection of distal tip:	110°/110°
Direction of view:	0°
Angle of view:	90°
Working channel diameter:	1.48 mm
Outer diameter:	3.5 mm/3.6 mm
Working length:	240 mm

**The following accessories are included in delivery:**

**Leakage Tester**  
**Cleaning Brush**  
**2x Sealing Cap**  
**LUER-Lock Sealing Cap**  
**Coagulation Electrode**  
**LUER-Lock Tube Connector**

## KARL STORZ TELE PACK+

The new TELE PACK+ from KARL STORZ is an ALL-IN-ONE system that integrates a monitor, LED light source, FULL HD camera control unit and a documentation terminal with integrated network function in a portable and compact unit.

### Special Features:

- Image display in FULL HD quality
- 18.5" touch screen monitor with on-screen keyboard
- Possibility to archive documentation on USB memory devices and internal storage memory of 50 GB
- Network functionality in combination with the SCENARA® .CONNECT software tool allows the export and import of patient data in/out of HIS/PACS
- Compatible with rigid, flexible and single-use endoscopes from KARL STORZ



- TP101      **TELE PACK+**, endoscopic video unit with 2 camera inputs (X-Line and C-Line) for use with flexible videoendoscopes and one-chip camera heads (up to FULL HD), incl. LED light source, digital Image Processing Module with USB and network storage options as well as 18.5" FULL HD touch screen monitor, power supply 100-240 VAC, 50/60 Hz including:  
**Mains Cord**, length 300 cm
- TH110      **IMAGE1 S™ HX One-Chip FULL HD Camera Head**, 50/60 Hz, fixed focus, progressive scan, soakable, gas- and plasma-sterilizable, focal length  $f = 16$  mm, 2 freely programmable camera head buttons, for use with IMAGE1 S™

## ENDOMAT® SELECT

The ENDOMAT® SELECT is a roller pump that – based on various software modules – can be used across multiple disciplines. For diagnostic and operative hysteroscopy, the ENDOMAT® SELECT allows pressure-controlled dilation of the uterine cavity in the OR as well as in outpatient clinics or office settings.

### Special Features:

- Permanent pressure control during the distension of the uterine cavity
- Suction/irrigation pump for interdisciplinary and universal use
- Straightforward handling thanks to cassette tubing set and tubing set recognition




- UP210      **ENDOMAT® SELECT**, suction or irrigation pump, incl. mains cord, power supply 100-240 VAC, 50/60 Hz
- UP602      **HYSTEROSCOPY Software**, license, allows the selection of the procedure “HYS”, for use with ENDOMAT® SELECT UP210
- 031523-10      **Tubing Set**, irrigation, PC, sterile, for single use, package of 10, for use with KARL STORZ HAMOU® ENDOMAT® 26331120-1 and ENDOMAT® SELECT UP210



## Recommended Set-up for “Office Hysteroscopy”

Outsourcing hysteroscopic procedures makes it possible to free up OR capacity for major surgery. To accommodate the trend towards “office hysteroscopy”, we have combined the following compact set-up solution for outpatient hysteroscopy for your convenience.

Narrow-lumen hysteroscopes make it possible to treat any abnormalities in the uterine cavity with the help of 5 Fr. instruments, even outside the OR and without anesthesia or dilation of the cervix. The TELE PACK+ meets the requirements of a compact and flexible system with high image quality. The new COR mobile stand offers a suitable solution for the office in the form of a compact equipment cart.

UG803	<b>Subrack</b> , for COR mobile stand, low
UG811	<b>Top Cover Monitor Holder</b> , for COR mobile stand
UG854	<b>Stainless Steel Tube</b> , for COR mobile stand, length 400 cm
UG857	<b>Monitor Module</b> , for COR mobile stand
UG860	<b>Drawer</b> , narrow, for COR mobile stand
TP101	<b>TELE PACK+</b> , endoscopic video unit
TH110	<b>IMAGE1 S™ HX One-Chip FULL HD Camera Head</b>
UP210	<b>ENDOMAT® SELECT</b> , suction or irrigation pump
UP602	<b>HYSTEROSCOPY Software</b> , license, for use with ENDOMAT® SELECT UP210
031523-10	<b>Tubing Set for Irrigation</b> , sterile,  for single use, package of 10
26008BAC	<b>CAMPO TROPHYSCOPE®</b> , HOPKINS® telescope 30°, size 2.9 mm, length 24 cm
26152DA	<b>Continuous-Flow Examination Sheath</b> , size 3.7 mm, length 18 cm
26152DB	<b>Continuous-Flow Operating Sheath</b> , size 4.4 mm, length 16 cm
26159UHW	<b>Biopsy and Grasping Forceps</b> , semirigid, double action jaws, 5 Fr., length 34 cm
26159SHW	<b>Scissors</b> , pointed, single action jaws, 5 Fr., length 34 cm



It is recommended to check the suitability of the product for the intended procedure prior to use.  
Please note that the described products in this medium may not be available yet in all countries due to different regulatory requirements.

**Reply**

**KARL STORZ SE & Co. KG**  
**Marketing Gynecology**  
**Dr.-Karl-Storz-Straße 34**  
**78532 Tuttlingen/Germany**

**or by fax to**  
**+49 7461 708-75585**

Yes, I am interested in **(Office) Hysteroscopy**

Please send me an **offer** regarding a:

- CAMPO TROPHYSCOPE®**  
(26008BAC, 26152DA/DB)
- **BETTOCCHI® Hysteroscope**
  - size 4 mm (26008BA, 26152BIK/26152BOK)
  - size 5 mm (26120BA, 26153BIK/26153BOK)
  - size 5 mm, elongated (26120BAL, 26153BIL/26153BOL)
- **BETTOCCHI® Integrated Office Hysteroscope (B.I.O.H.®)**
  - with long handle (26252BK)
- Flexible Hysteroscope** (11264BBK1)
- TELE PACK+** (TP101 and TH110)
- ENDOMAT® SELECT** (UP210 and UP602)
- Set-up solution for outpatient hysteroscopy**
  
- I would like to request an appointment with a sales representative.

My address:

\_\_\_\_\_  
**Name, Title**

\_\_\_\_\_  
**Tel.**

\_\_\_\_\_  
**Clinic, Department**

\_\_\_\_\_  
**Fax**

\_\_\_\_\_  
**Street**

\_\_\_\_\_  
**E-mail**

\_\_\_\_\_  
**Postal Code, Town/City**

\_\_\_\_\_  
**Signature**

More than  
**75**  
Years

*Shaping the Future  
of Endoscopy with you*

**STORZ**  
KARL STORZ—ENDOSKOPE

THE DIAMOND STANDARD

KARL STORZ SE & Co. KG  
Dr.-Karl-Storz-Straße 34, 78532 Tuttlingen/Germany  
Postbox 230, 78503 Tuttlingen/Germany  
Phone: +49 7461 708-0  
Fax: +49 7461 708-105  
E-Mail: [info@karlstorz.com](mailto:info@karlstorz.com)

[www.karlstorz.com](http://www.karlstorz.com)

